





DBCI's 3000 Series commercial-grade steel door is built with superior, high-strength materials and is engineered to withstand moderate to high wind loads common in many coastal regions. The 3000 Series features ribbed corrugation with an "L" shaped windlock design that grips in place under high pressure, and an 80-degree profile that makes installation fast and easy.

HEADROOM 20" (UP TO 10') 22" (10'-14') 24" (OVER 14')





WARRANTY 40/35 FILM/CHALK-FADE




3000 SERIES

HEAVY DUTY ROLL-UP

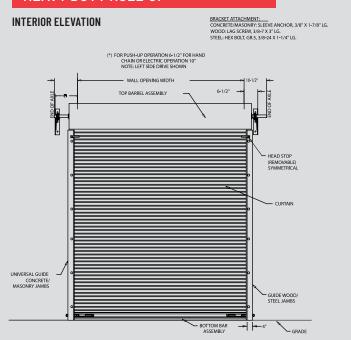

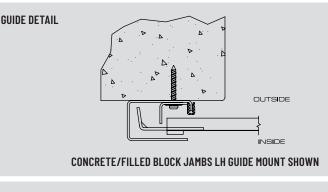

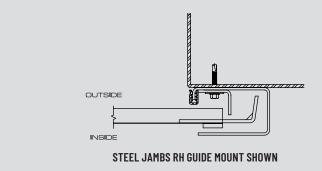

CURTAIN

- 26-gauge galvanized, Grade 80 steel
- 5/8" ribbed corrugation
- Maximum opening size 20' x 16'
- Super-durable polyester paint

BOTTOM BAR

- 6063 T6 aluminum extrusion
- Bulb astragal
- · Stainless steel nuts and bolts

DEAD AXLE-DRUM ASSEMBLY

- 1-5/16" O.D. steel axle, 11-gauge
- Utilizes 12", 16-gauge drums
- Shielded steel ball bearings in drums
- Pre-lubricated, enclosed springs

A.C.E. (ADVANCED CURTAIN ENGAGEMENT) GUIDE SYSTEM

- 14-gauge galvanized steel
- 14-gauge wind lock bar
- Adjustable bolt on head stop
- Polyethylene wear strip
- Pre-punched holes for lock and attachment fasteners

HARDWARE

- Saddle clamps with set fasteners
- Slide locks, two per door
- Step plate; two per door
- 1/4" steel angle T-bracket

OPTIONS

- Chain hoist 8:1 reduction
- Header seal
- Hood
- Steel mounting plates
- Motor operated
- Available in more than 30 color options, subject to availability and varying lead times



The 3000 Series is wind rated up to 16' wide.
The pressure rating increases as the door width decreases.

